



PRISMATIC REFLECTORS

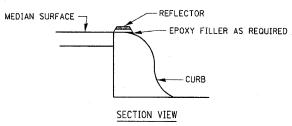

- 1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
- 2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
- 3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.


OPTION 1

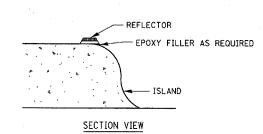


- 1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
- 2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
- 3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.

OPTION 2

REVISIONS NAME	DATE	ILLINOIS DEPARTM	ENT OF TRANSPORTATION
		DETAILS	
		SCALE: VERT. HORIZ. DATE	DRAWN BY CHECKED BY

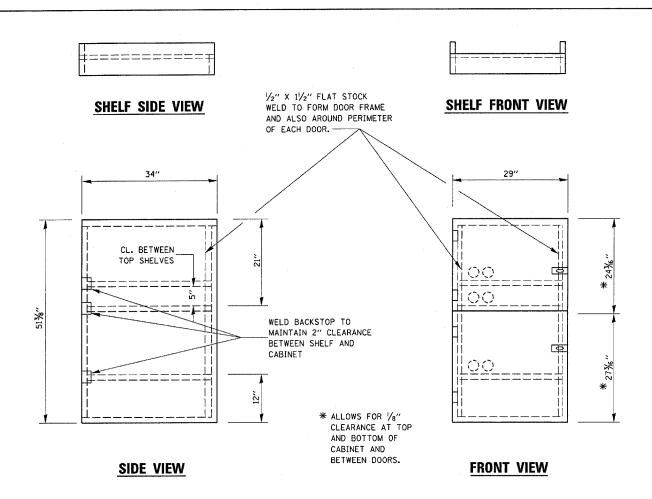

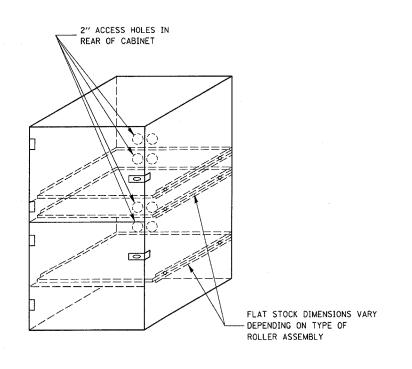

- 1. USE 16 GAUGE STEEL FOR CABINET.
- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE $4^{\prime\prime}$ x $4^{\prime\prime}$ SQUARE CORNER HINGES TO BE WELDED ON.
- 9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 71/4" HASPS TO BE WELDED ON.